ELEVATION A2

ITEM 34
EXTRACTION CANOPY.
LIGHTING to be interconnected to main lighting circuit (by others).
EXTRACTION RATES to be confirmed by specialist manufacturer.

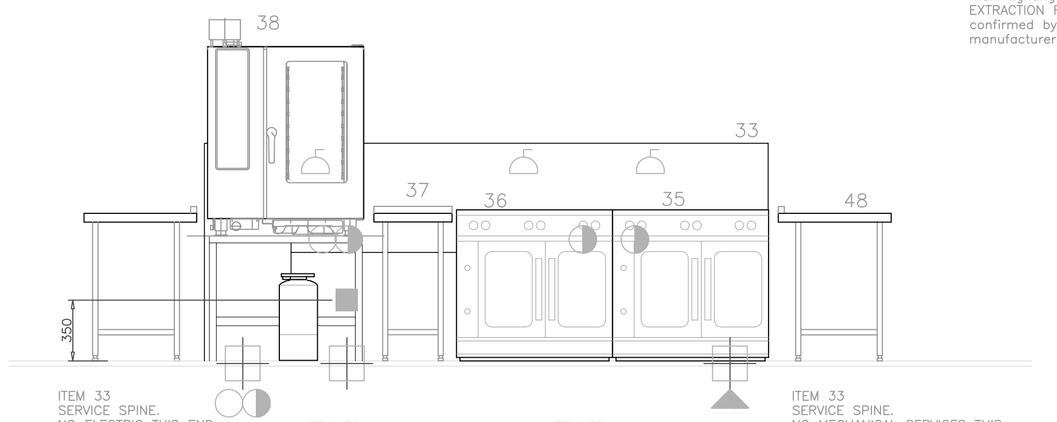

ITEM 33
SERVICE SPINE.
NO ELECTRIC THIS END
GAS service rising from under floor into service spine at this end.
MCW service rising from under floor into service spine at this end.
Mechanical services contractor to make an allowance for all services on island suite in designing and installing pipework.
Mechanical service contractor to install pipework within duct, HCES to make final connection to equipment.

ITEM 38
COMBINATION OVEN.
ELECTRIC 1kW SP+N (16amp protection)
FUSED SWITCHED SPUR on service spine.
22mm GAS 38.4kW outlet on service spine.
22mm MCW via water filter service terminated on spine.
54mm WASTE trapped tundish @350mm AFFL
ALL SERVICES VIA SERVICE SPINE

ITEM 35
CONVECTION OVEN RANGE.
ELECTRIC 3amp SP+N
FUSED SWITCHED SPUR on service spine.
15mm GAS @45kW outlet on service spine.
ALL SERVICES VIA SERVICE SPINE
ITEM 36
CONVECTION OVEN RANGE.
ELECTRIC 3amp SP+N
FUSED SWITCHED SPUR on service spine.
15mm GAS @45kW outlet on service spine.
ALL SERVICES VIA SERVICE SPINE

ITEM 33
SERVICE SPINE.
NO MECHANICAL SERVICES THIS END
ELECTRICAL service rising from under floor into service spine at this end.
Electrical services contractor to make an allowance for all services on island suite in designing and installing conduit.
Connection to fused spur outlets by electrical contractor.

A2

PLAN VIEW

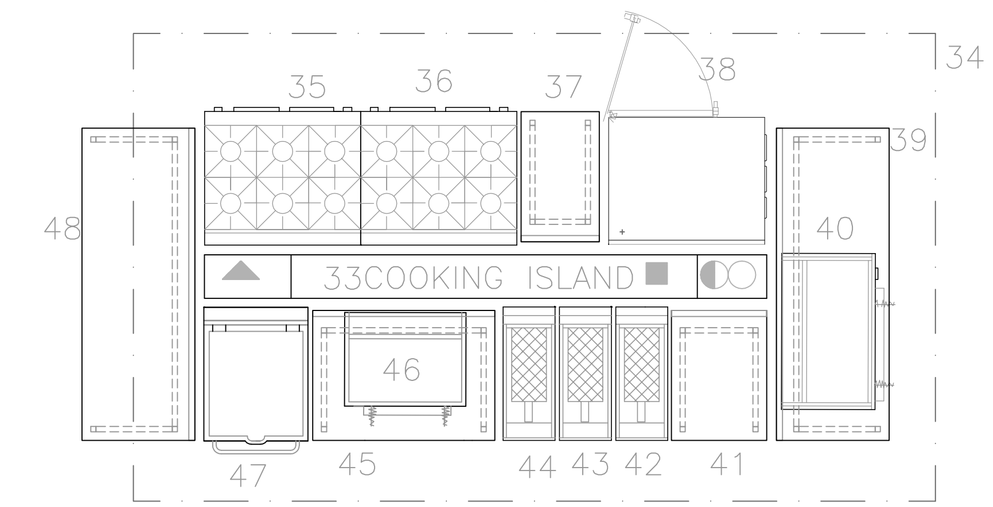

B2

ELEVATION B2



ITEM 34
EXTRACTION CANOPY.
LIGHTING to be interconnected to main lighting circuit (by others).
EXTRACTION RATES to be confirmed by specialist manufacturer.

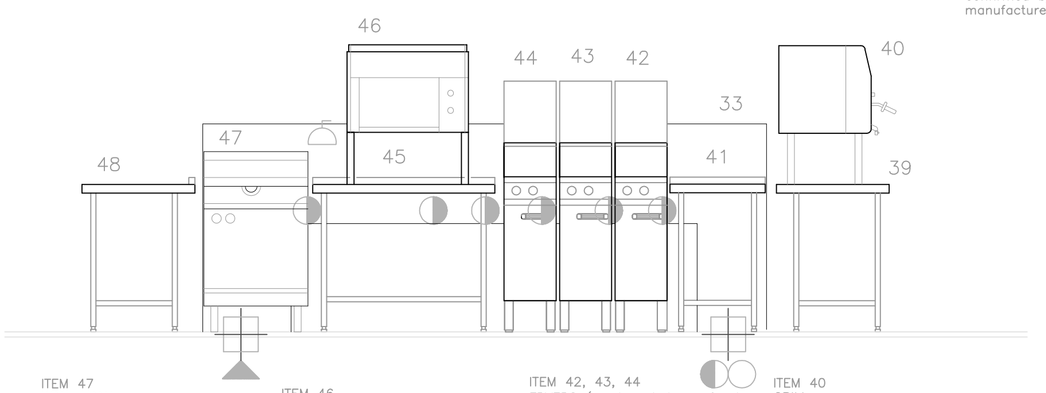

ITEM 47
BRATT PAN.
ELECTRIC 3amp SP+N
FUSED SWITCHED SPUR on service spine
15mm GAS @11.2kW outlet on service spine.
ALL SERVICES VIA SERVICE SPINE

ITEM 33
SERVICE SPINE.
NO MECHANICAL SERVICES THIS END
ELECTRICAL service rising from under floor into service spine at this end.
Electrical services contractor to make an allowance for all services on island suite in designing and installing conduit.
Connection to fused spur outlets by electrical contractor.

ITEM 46
GRILL.
NO ELECTRICAL REQUIREMENT
15mm GAS @9.5kW outlet on service spine.
ALL SERVICES VIA SERVICE SPINE

ITEM 42, 43, 44
FRYERS (services below refer to 1no. fryer only).
NO ELECTRICAL REQUIREMENT
15mm GAS @19.9kW outlet on service spine.
ALL SERVICES VIA SERVICE SPINE

ITEM 40
GRILL.
NO ELECTRICAL REQUIREMENT
15mm GAS @13.1kW outlet on service spine.
ALL SERVICES VIA SERVICE SPINE

ITEM 33
SERVICE SPINE.
NO ELECTRIC THIS END
GAS service rising from under floor into service spine at this end.
MCW service rising from under floor into service spine at this end.
Mechanical services contractor to make an allowance for all services on island suite in designing and installing pipework.
Mechanical service contractor to install pipework within duct, HCES to make final connection to equipment.

ELEVATION A2

LOOKING AT COMBI OVEN

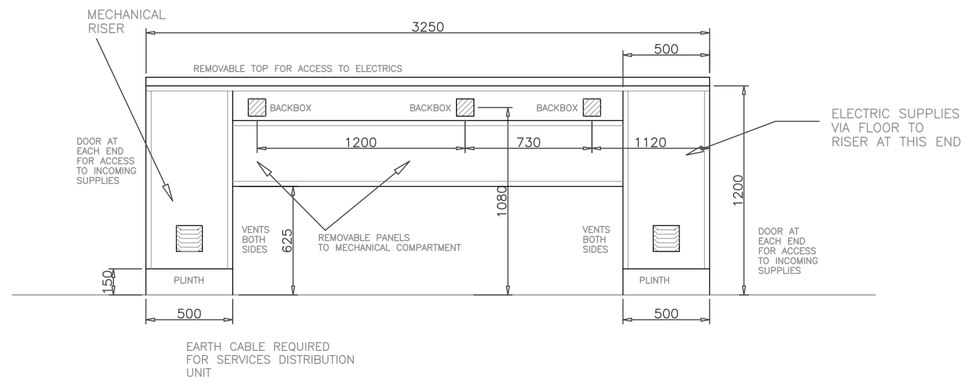

EARTH CABLE REQUIRED FOR SERVICES DISTRIBUTION UNIT

PLAN VIEW (SERVICE SPINE ONLY)

PLAN SHOWING GAS VALVE LOCATIONS ON UNDERSIDE OF SPINE

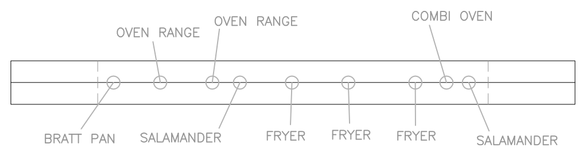

SECTION THROUGH SERVICE SPINE

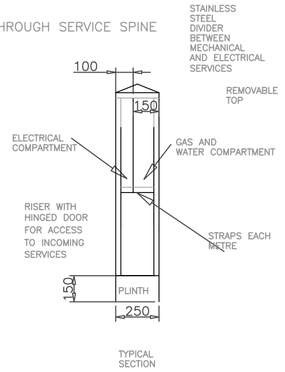

PLEASE NOTE
GAS VALVE MUST NOT BE POSITIONED IN SERVICE DISTRIBUTION UNIT RISER.

TYPICAL SECTION

ELEVATION B2

LOOKING AT FRYERS AND BRATT PAN

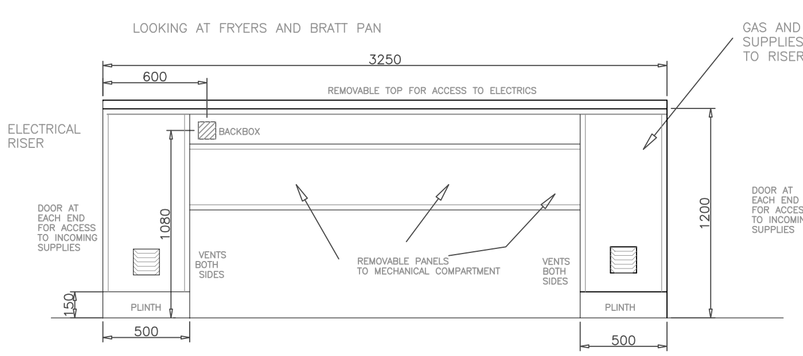

EARTH CABLE REQUIRED FOR SERVICES DISTRIBUTION UNIT

PLEASE NOTE
GAS VALVE MUST NOT BE POSITIONED IN SERVICE DISTRIBUTION UNIT RISER.

REVISION NOTES

GENERAL NOTES

ALL SERVICES SHOWN ARE BASED UPON CURRENT MANUFACTURERS RECOMMENDATIONS WHICH CAN BE SUBJECT TO OCCASIONAL CHANGES

ALL SERVICES SUPPLIES ARE TO BE FITTED. ISOLATORS / ISOLATING VALVES/ STOPCOCKS / SWITCHES, AS APPLICABLE TO CONFORM TO THE LATEST & MOST CURRENT REGULATIONS.

ALL ISOLATORS / ISOLATING VALVES/ STOPCOCKS / ISOLATING SWITCHES, ARE TO BE SIZED,SITED, SUPPLIED & FITTED BY OTHERS, UNLESS SPECIFICALLY STATED

ALL ISOLATORS SHOWN ARE SUGGESTED POSITIONS ONLY

ALL WATER STORAGE TANKS / CISTERNS / CALORIFIERS, ETC. ARE TO BE SIZED TO CONFORM TO THE LATEST IN WRAS PLUMBING REGULATIONS, AND ARE TO BE SIZED, SITED, SUPPLIED & FITTED BY OTHERS

SERVICE SYMBOLS.

- electrical connection.
- electrical isolator
- switch socket outlet
- switched spur
- gas connection
- hot water connection
- cold water connection
- waste outlet
- postmix python
- refrigeration line
- steam connection
- holes through floor slab

SCALE 1:25	DRAWN JB	NUMBER
DATE	CHECKED	FILE

CLIENT

TITLE

FOR DESIGN APPROVAL ONLY

THIS DRAWING SHOULD NOT BE USED FOR SERVICE DETAILS OR FOR CONSTRUCTIONAL DIMENSIONING PURPOSES